Notes:

• Tanks are constucted from 20-gauge G-90 grade galvanized steel or 304 stainless steel.


• Tops are constructed from 22-gauge G-90 grade galvanized steel or 304 stainless steel.

• All joints to be sealed with Sikaflex-1a, NSF-61 rated for potable water.

• Internal surfaces of the tank to be coated with Sherwin Williams, Macropoxy 646-PW NSF-61 rated.

° Optional 12" or 16" stainless steel screened filter basket.

° Standard bulkhead fitting thread 3/4", 1 1/4", or 2".

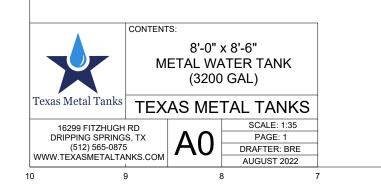

6

