





NOZZLE SCHEDULE								
	ITEM	SIZE	RATING	TYPE	MATL	PROJ IN	PROJ OUT	REMARKS
	Α	3''	N.P.T.	W.F.	C.S.	STD.	STD.	EMERGENCY VENT OPENING
	В	2''	N.P.T.	W.F.	C.S.	STD.	STD.	
	С	3/4"	N.P.T.	W.F.	C.S.	STD.	STD.	DRAIN

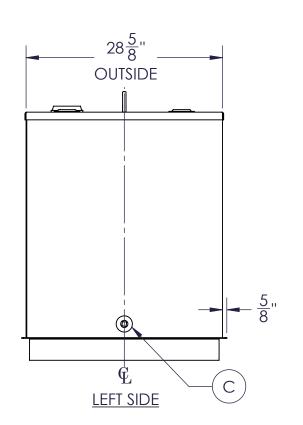

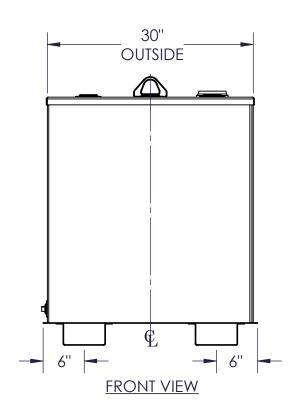

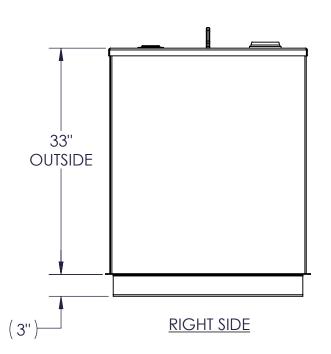

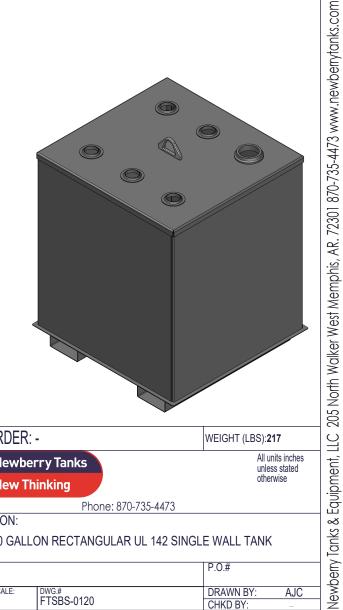

## **NOTES:**

- MATERIAL: H.R. CARBON STEEL
- DESIGN & OPERATING PRESSURE: ATMOSPHERIC.
- DESIGN & OPERATING TEMPERATURE: AMBIENT. C.
- D. TANK TO BE BUILT & LABELED PER U.L. SPEC. #142.
- TANK TO BEAR MANUFACTURERS & U.L. LABELS ONLY.
- TANK TO BE AIR TESTED WITH WATER & SOAP SUDS SOLUTION.
- G.
- INTERIOR: REMOVE WELD SLAG (SHIP CLEAN & DRY).
  EXTERIOR: GRAY PRIMER INCLUDED; SEE SALES ORDER FOR TOP COAT. Η.
- ALL FITTINGS TO BE PROTECTED FOR SHIPMENT.
- CUSTOMER HAS THE RESPONSIBILITY TO VERIFY ALL DIMENSIONS.

APPROVAL FOR CONSTRUCTION SCHEDULE A - MASTER TERMS & CONDITION OF SALE*	
ADDDOVED AC DDAMA	

## ☐ APPROVED AS DRAWN

APPROVED WITH NOTED CHANGES, CONSTRUCTION WILL BE SCHEDULED WHEN SIGNED DRAWING AND CONFIRMED ORDER ARE RECEIVED.

\*All pages of this Schedule A are incorporated by reference and are a part of the additional terms of the Master Terms & Conditions of Sale. www.newberrytanks.com/masterterms.pdf

## SALES ORDER: -Newberry Tanks

**New Thinking** 

Phone: 870-735-4473

All units inches

unless stated

DESCRIPTION:

120 GALLON RECTANGULAR UL 142 SINGLE WALL TANK

CUSTOMER

DATE: 2/7/2023 DWG.# FTSBS-0120 DRAWN BY CHKD BY: