


Maelstrom™



A breakthrough in
rain harvesting technology

RAIN HARVESTING
by Blue Mountain Co

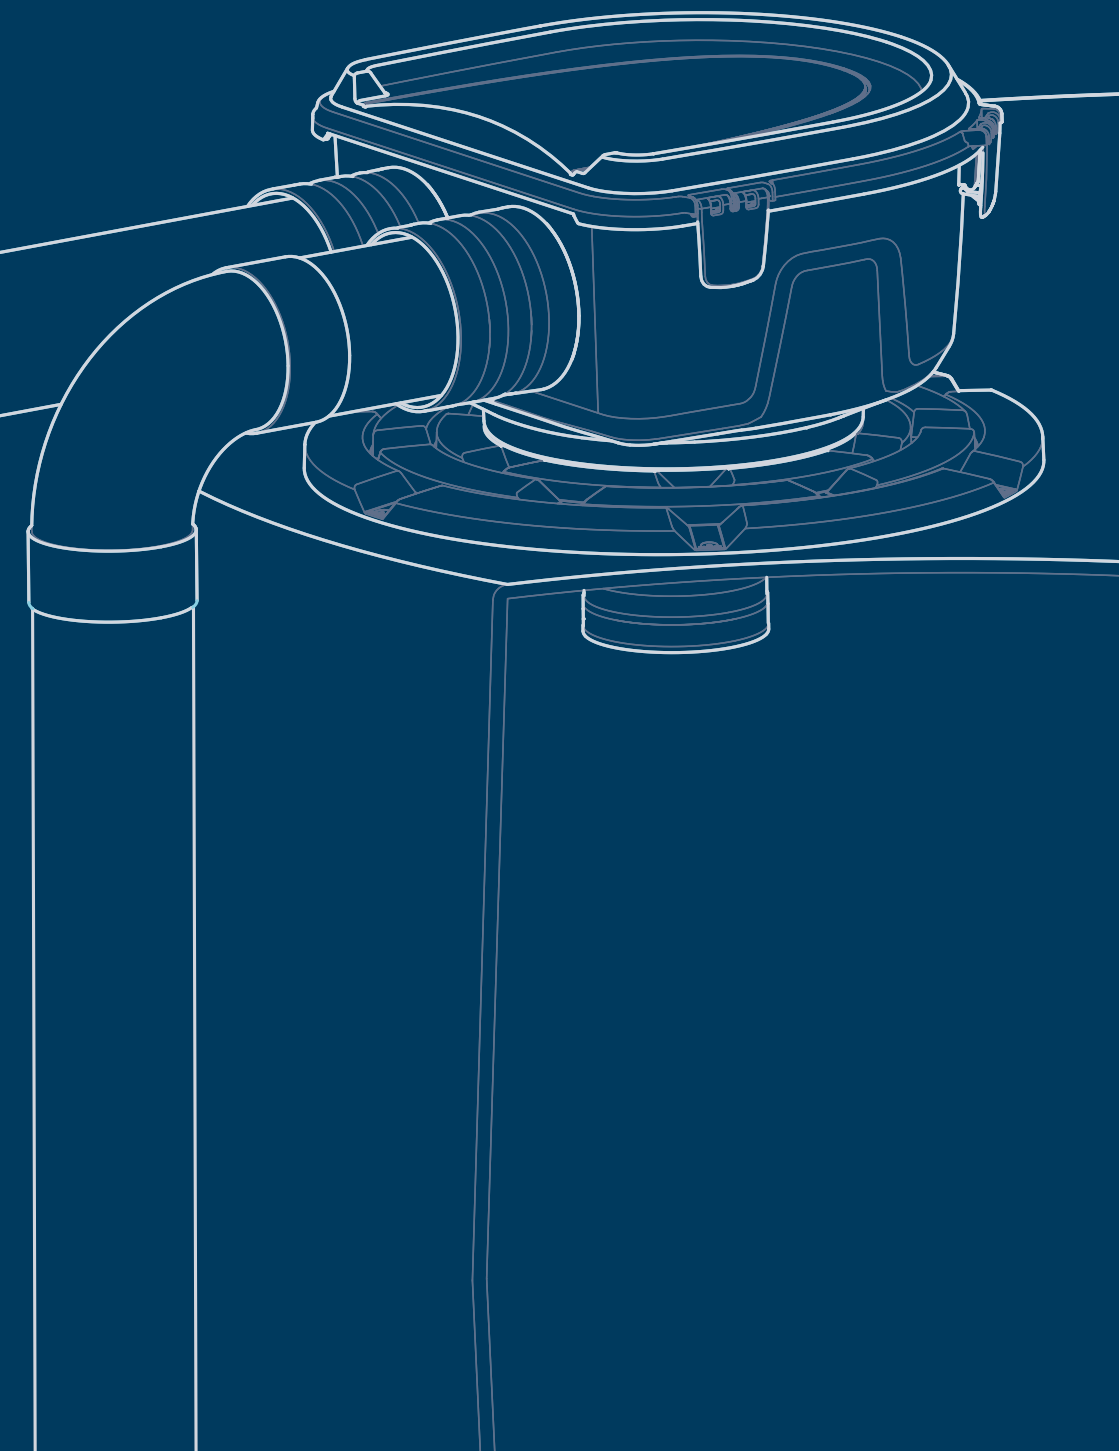

Raising rainwater to entirely new levels.

Maelstrom, the most advanced filter we have ever made, sets a new standard in pre-tank rainwater filtering.

Cleaner

Maelstrom's ultra-fine 180 micron filter removes particles 5 times smaller than standard rain-head and tank screens.

Faster

Even at rapid flow rates of 36,000 Litres (9,510gal) per Hour, Maelstrom retains 96% water catchment efficiency.

Higher

Filtering multiple lines at a single point is a simple way to keep tanks filled to the max.

How It Works.

- ① Rainwater from the gutters flows into the U-shaped filter.
- ② The first 2mm (0.08") filter diverts leaves and larger debris.
- ③ The second, ultra-fine 180micron filter stops even finer particles.
- ④ During major rain events, overflow helps flush-out leaves and debris.
- ⑤ A final 0.955mm (0.04") screen prevents mosquitoes entering tanks to breed.
- ⑥ The filtered water is funnelled through the base into the tank.





Suitable for just about anywhere.

It tackles the big issues.

Maelstrom plays a major role in tackling some of the biggest issues facing rain harvesters like:

- Having enough water.
- Filtering leaves and debris.
- Removing suspended particles.
- Securing the tank to keep out pests (including mosquitoes) and sunlight (to prevent algae growth).
- Easy maintenance.

Easy install on systems new & old.

The Maelstrom is compatible with all your standard rain harvesting set-ups including:

- Tank Top
- In-Tank
- In-Ground
- Wall Mounted



RESIDENTIAL
PROPERTIES.



REMOTE AREAS
& FARMSTEADS.



COMMERCIAL
& LOCAL RETAIL.



SCHOOLS
& UNIVERSITIES.



SUSTAINABLE LIVING
& GREEN BUILDINGS.




TRANSPORTATION
HUBS.

Insist on a clear, colourless,
odourless and plentiful rain
water supply.

For more information call us on
+61 (0)7 3248 9600

Specifications.

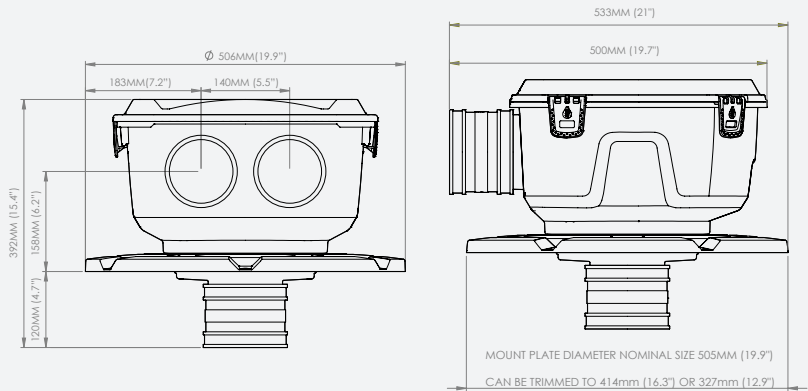

Primary Filter	2mm (0.08") Aperture, Polypropylene
Secondary Filter	0.18mm (180µm) Aperture, Nylon
Mosquito Proof Screen	0.955mm (0.04") Aperture, SS316
Inlet & Outlet Pipe Size	DN100 (110mm OD) / 4" OD
Coupling	Flexible, EPDM
Body & Base Plate	ABS, Polypropylene

Performance Data

Water Catchment Efficiency @ 5L (1.32gal) / second*	99%
Water Catchment Efficiency @ 10L (2.64gal) / second*	96%

*For wet/charged system configuration with clean water flow

Blue Mountain Co

PO Box 1246
Milton QLD 4064 Australia
+61 (0)7 3248 9600
info@bluemountainco.com

bluemountainco.com